

Micro Environment Monitoring System / Remote Temperature/Humidity Sensor over IP

ENVIROMUX®

Monitor and manage environmental and security conditions over IP. Provides early warnings before critical events turn into disaster.

Environment Monitoring

- Temperature
- Humidity
- Water Leaks
- Air Flow
- Power
- Motion / Intrusion
- Vibration
- Smoke / Carbon Monoxide

Alert Notifications

- Email
- SNMP
- Web Page
- SMS Messages

Key Features

- ENVIROMUX-MICRO-T
 - 1 integrated sensor – temperature
 - 2 RJ45 ports for external temperature/humidity sensors
 - 2 digital inputs sensitive to contact closure
 - Dual DC power provides dual redundancy.
- ENVIROMUX-MICRO-TRHP
 - 2 integrated sensors – temperature, humidity
 - 2 RJ45 ports for external temperature/humidity sensors
 - 2 digital inputs sensitive to contact closure
 - Built-in Power over Ethernet (POE) and dual DC power provides triple redundancy.
- Sensors are hot pluggable.
- Monitor (ping) up to 4 IP network devices – alerts are sent if devices are not responding.
- Sensor conditions can be configured to trigger alerts by themselves, and/or be used in combination with other alerts to trigger one Smart Alert.
- Supports 4 IP network video cameras for live view of any facility.
- USB port for connecting USB modem.
- Integrates with various Open Source SNMP monitoring packages – Nagios and MRTG
- (Coming Soon) Optional intuitive graphical management software provides an easy-to-use, unified interface for both monitoring and configuring up to 3,000 ENVIROMUX units and all connected sensors.




ENVIROMUX-MICRO-T

- **Integrated temp/humidity sensors, 2 temp/humidity ports, 2 digital inputs**
- **USB port for 3G modem**
- **Power over Ethernet option**

The ENVIROMUX® Micro Environment Monitoring System monitors critical environmental conditions, such as temperature, humidity, liquid water presence, power, intrusion, and smoke. When a sensor goes out of range of a configurable threshold, the system will notify you via email, web page, network management (SNMP), and/or SMS messages (via external USB 3G modem).

The system functions independently or as an IP-connected remote sensor for the ENVIROMUX-2D/5D/16D. The ENVIROMUX-MICRO-T features an integrated temperature sensor, two RJ45 sensor ports for external temperature/humidity sensors, and two dry contact inputs. The ENVIROMUX-MICRO-TRHP features an integrated temperature/humidity sensor, two RJ45 sensor ports for external temperature/humidity sensors, two dry contact inputs and built-in Power over Ethernet (PoE).

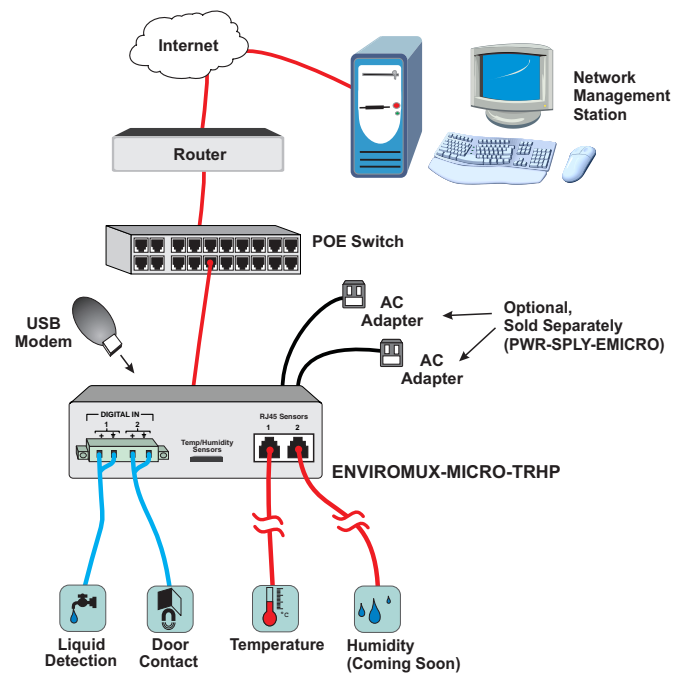

Micro Environment Monitoring System / Remote Temperature/Humidity Sensor over IP

ENVIROMUX®

Monitor and manage environmental and security conditions over IP. Provides early warnings before critical events turn into disaster.

	ENVIROMUX-MICRO-T	ENVIROMUX-MICRO-TRHP
Integrated Sensors	1	2
Temperature	-4 to 185°F (-20 to 85°C) ±0.72°F at -14 to 185°F (±0.4°C at -10 to 85°C) ±0.9°F at -4 to 23°F (±0.5°C at -20 to 5°C)	-4 to 185°F (-20 to 85°C) ±0.72°F at -14 to 185°F (±0.4°C at -10 to 85°C) ±0.9°F at -4 to 23°F (±0.5°C at -20 to 5°C)
Humidity	N/A	0 to 80% relative humidity, ±2% 80 to 90% relative humidity, ±3%
RJ45 Sensor Ports	2 Compatible with: ENVIROMUX-T-E7, ENVIROMUX-T-IND-E7, ENVIROMUX-TRHM-E7	2 Compatible with: ENVIROMUX-T-E7, ENVIROMUX-T-IND-E7 ENVIROMUX-TRHM-E7
Digital Inputs – Screw Terminal Pairs	2	2
Alerts	5 Methods	5 Methods
Email	✓	✓
Web Page	✓	✓
SNMP traps (v1, v2c)	✓	✓
Syslog	✓	✓
SMS Messages	✓ – via external USB 3G modem (not included)	✓ – via external USB 3G modem (not included)
Smart Alerts	1	1
IP Cameras	✓ – up to 4 cameras	✓ – up to 4 cameras
Control Methods	3 Methods	3 Methods
Web Interface	✓	✓
Telnet Monitoring	✓	✓
SNMP Monitoring (v1, v2c)	✓	✓
USB Ports for Modem	1	1
Expandable (Coming Soon)	Up to 3,000 units via optional management software	Up to 3,000 units via optional management software
Flash Upgrade	✓	✓
Protocols Supported HTTP/HTTPS, SNMP V1/V2c, SMTP, TCP/IP, Syslog, SNTP, DHCP, SSLv3, AES 256-bit, 3DES, Blowfish, RSA, EDH-RSA, Arcfour	✓	✓
Restore Defaults Button	✓	✓
Operating & Storage Temperature	-4 to 185°F (-20 to 85°C)	-4 to 185°F (-20 to 85°C)
Operating & Storage Relative Humidity	0 to 99% non-condensing RH	0 to 99% non-condensing RH
Monitor (Ping) IP Devices	✓ – up to 4 network devices	✓ – up to 4 network devices
Power	Dual DC Power	Built-in Power-over-Ethernet (POE) Dual DC Power
	110 to 240 VAC at 50 or 60 Hz via AC adapter (Includes one country- specific AC adapter. The second AC adapter is sold separately.)	110 to 240 VAC at 50 or 60 Hz via AC adapter (Not included. Country-specific AC adapters sold separately – PWR-SPLY-EMICRO)
Dimensions WxDxH (in)	4x3.44x1.37	4x3.44x1.37
Mounting	Mounting holes to match rack hole spacing	Mounting holes to match rack hole spacing
Regulatory Approvals	CE, RoHS	CE, RoHS
Warranty	2 years	2 years

Note: Specifications are subject to change. Call an NTI product consultant for the most up-to-date information.