

How to let up to eight users control 32 USB-enabled PC, SUN and MAC computers

- Equipped with OSD, Liquid Crystal Display, and RS232.
- Rackmount is standard on all UNIMUX-nXm-U models. The smaller models are also available in a desktop case.
- Dedicated microprocessors prevent computers from locking up, ensuring reliable control.
- Fully compliant with USB standards (1.0, 1.1).
- The advanced OSD user interface with password security makes the UNIMUX USB KVM Matrix Switch simple and reliable to use in Enterprise data centers.
- Computers can be shared or used exclusively.
- Crestron® compatible.
- Optional stereo audio support using an Audio Matrix Add-On Switch (not included).
 - Supported USB KVM Matrix Switches (UNIMUX-nXm-UA) feature a male DB9 connector for connecting the Audio Matrix Add-On Switch.



UNIMUX-4X16-U (Front and Back)

• Up To Eight Users Control 32 USB-enabled PC, SUN and MAC Computers

The UNIMUX™ USB KVM Matrix switch allows up to eight users to individually command or simultaneously share up to 32 USB computers. Access USB-enabled PC, SUN, and MAC computers using USB keyboards and mice, and VGA multiscan monitors.

USB host computers and USB devices can be hot-plugged or removed at any time. Allows any USB device (keyboard and/or mouse) to control any attached USB host computer. International keyboard layouts are supported in auto-detection mode, or can be manually selected via the On Screen Display (OSD) menu.

Specifications

Hosts

- Female 15-pin HD and female USB Type B connectors.
- Multiplatform support: Windows 2000/XP/Vista/7, Windows Server 2000/2003/2008, Solaris, Linux, FreeBSD, and MAC OS 9/10.
- Supports PCs with USB-enabled OS (Windows 98/ME/2000/XP, Windows Server 2003, Linux) and USB ports.
- Supports PCs with USB-enabled BIOS (legacy USB support) and USB ports.
- Supports SUN Blade 100, SUN Blade 1000, SUN Fire™ 240 and SUN Ray.
- Supports MAC G4, G5 and Xserve.
- Supports MAC soft (keyboard) power-on.
- Any legacy PS/2 or SUN computer can be connected by using a USB-PS2-R or USB-SUN-R adapter.

Monitor

- Crisp and clear 1900x1200 resolution.
- Female 15-pin HD connectors.
- A multiscan VGA monitor is required to display the different video outputs from different platforms.
- Bandwidth is 150 MHz.

Environmental

- Operating temperature: 32°F to 100°F (0°C to 38°C)
- Storage temperature: -20°F to 140°F (-30°C to 60°C)
- Operating and Storage Relative Humidity: 17 to 90% non-condensing RH.

Regulatory Approvals

- CE, RoHS
- TAA compliant

Devices

- Female USB Type A connectors for keyboards and mice.
- Compatible with most USB keyboards and mice, including Microsoft USB Intellimouse®, Logitech Cordless Elite Duo keyboard and mouse, Gyratation keyboard/mouse, Crystal Vision keyboard with touchpad, and iKey DI-5K USB.
- Keyboard and mouse are hot-pluggable.
- USB MAC and SUN startup keys are supported on all platforms of input devices.
- Keystrokes are translated across platforms.

Power

- 110 or 220 VAC at 50 or 60 Hz via AC adapter.
- Power consumption: 10W
- Use the PWR-48V-5V2A DC-DC power converter to install the UNIMUX-nXm-U in a Telecom environment.

Warranty


- Two years

MTBF

NTI Part #	Hours	NTI Part #	Hours
UNIMUX-2X8-U	58,644	UNIMUX-2X16-U	54,742
UNIMUX-2X32-U	42,634	UNIMUX-4X8-U	53,776
UNIMUX-4X16-U	50,289	UNIMUX-4X32-U	38,775
UNIMUX-8x8-U	41,112	UNIMUX-8X16-U	40,545
UNIMUX-8x24-U	37,818	UNIMUX-8X32-U	36,114

How to let up to eight users control 32 USB-enabled PC, SUN and MAC computers

Configuration and Cable Illustration

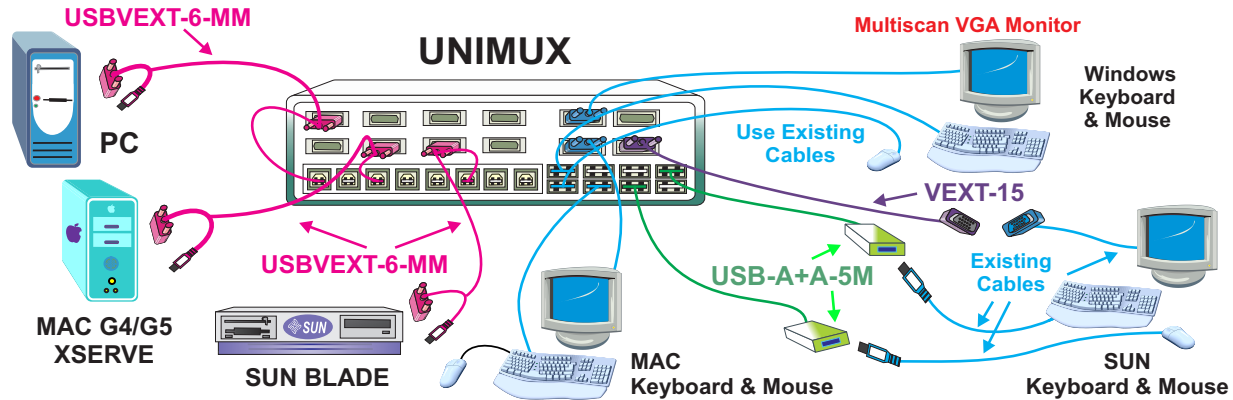

Options

Audio Matrix Add-On Switch

- Controlled through USB KVM Matrix Switch operations.
- 3.5mm female stereo audio jacks for inputs and outputs.
- One female DB9 connector for connecting to the compatible USB KVM Matrix Switch (UNIMUX-nXm-UA).
- Supported USB KVM Matrix Switches feature a male DB9 connector for connecting the Audio Matrix Add-On Switch.
 - UNIMUX-SA-8X8 compatible with UNIMUX-2X8-UA, UNIMUX-4X8-UA, UNIMUX-8X8-UA
 - UNIMUX-SA-16X16 compatible with UNIMUX-2X16-UA, UNIMUX-4X16-UA, UNIMUX-8X16-UA
- Input impedance: 10k Ohms.
- Signal-to-Noise Ratio (SNR): 87 dBA
- Frequency Response: 20 Hz to 20 kHz, ± 0.5 dB.
- Total Harmonic Distortion + Noise: 0.02% at 1kHz.
- Requires powered speakers or headphones.
- Powered by the USB KVM Matrix Switch.

Control Methods

Keyboard

- Type <Ctrl> + <'> to go into **Command Mode**.
- Press <ESC> to leave **Command Mode** and return to **Normal Mode**.
- Use the keyboard to command the switchbox to select ports or configure the **Scan**, **Sharing** and **Broadcast Modes**.
 - **Normal Operating Mode** allows the user to directly operate the selected computer with a transparent presence of the NTI switch.
 - **Sharing Mode** allows users to share the same computer.
 - **Command Mode** allows the user to give instructions to the switch through their keyboard. Keystrokes are not passed to the computer.
 - **Scan Mode** feature causes the switch to automatically and sequentially display the video from each selected powered on computer for a duration of 2-255 seconds (programmable by the user).
 - **Broadcast Mode** allows the user's keystrokes to be sent to all selected powered on computers.

Front Panel Interface


- Locally change ports with front panel buttons.
- Use front panel buttons to move through LCD screens and execute actions.
- LCD indicates currently selected port for each user.
- Use buttons to configure RS232 control.
 - Change baud rates for RS232.

How to let up to eight users control 32 USB-enabled PC, SUN and MAC computers

Control Methods (Continued)

On Screen Display (OSD)

- Select or list computers by name or port number.
- Port names can be up to 12 characters long.
- OSD is controlled by using the keyboard and mouse.
- Help Screens assist users with the OSD.
- Displays the power status of each computer.
- OS and software-independent.
- OSD comes built into the switch, no need to install additional hardware or software.

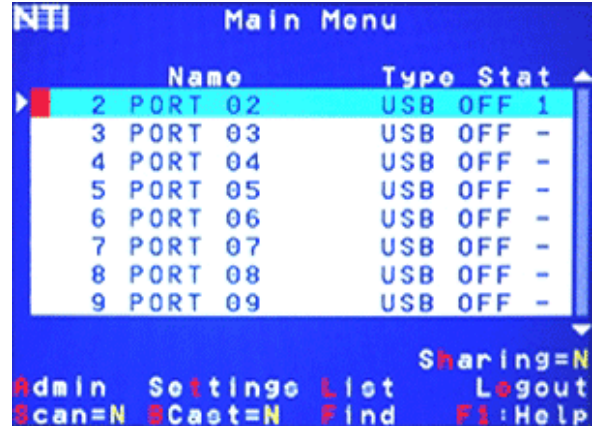

Security

- Advanced security included with switch.
- Each user password and name can be up to 13 characters long, and each switch can store up to 63 users.
- Administrator can enable or disable all security features and select which computers each user can access.
- Once security is enabled, a user or administrator must login in order to access any of the computers connected to the switch.

Ordering Specifications

This example explains the NTI part number by breaking it down into the available options. When ordering, choose the options that you require

UNIMUX - ^{Number of Users} n X ^{Number of CPUs} m - ^{Universal KVM Switch} U ^{Optional Desktop Style} DT ^{Optional Audio Matrix Port} A

The **Desktop units** are not compatible with the **Audio Matrix Add-On Switch**

USB KVM Matrix Switch Models

NTI Part #	# of Users (n)	# of CPUs (m)	Special Options	Desktop Size WxDxH (in)	Rack Units	Rack Size WxDxH (in)	Compatible with Audio Matrix Add-On Switch
UNIMUX-2X8-U	2	8	Desktop	10x7.5x3.3	1RU	19x10x1.75	Yes
UNIMUX-2X16-U	2	16		Not Available	1RU	19x10x1.75	Yes
UNIMUX-2X32-U	2	32		Not Available	2RU	19x10x3.5	No
UNIMUX-4X8-U	4	8	Desktop	10x7.5x3.3	1RU	19x10x1.75	Yes
UNIMUX-4X16-U	4	16		Not Available	2RU	19x10x3.5	Yes
UNIMUX-4X32-U	4	32		Not Available	3RU	19x10x3.5	No
UNIMUX-8X8-U	8	8		Not Available	3RU	19x12x5.25	Yes
UNIMUX-8X16-U	8	16		Not Available	3RU	19x12x5.25	Yes
UNIMUX-8X24-U	8	24		Not Available	3RU	19x12x5.25	No
UNIMUX-8X32-U	8	32		Not Available	3RU	19x12x5.25	No

Audio Matrix Add-On Switches

NTI Part #	# of Users (n)	# of CPUs (m)	Supported UNIMUX-nXm-UA models
UNIMUX-SA-8X8	8	8	2X8, 4X8, 8X8
UNIMUX-SA-16X16	16	16	2X16, 4X16, 8X16

Cables

- Interface cables between your computers and the switch are required for proper operation. Use USBVEXT-xx-MM and standard interface cables to connect switches to computers.
- Cables not included.