


Rackmount VGA USB + PS/2 KVM Drawer with Real Mouse

RACKMUX®

USB + PS/2 KVM Drawer how to provide space-saving convenient control with a real mouse.

- Allows users to store and use a real mouse.
- 17" (432 mm) TFT panel active matrix LCD display monitor.
- Compatible with USB and PS/2 computers.
- Torque-friction hinges – monitor does not wobble, spring, or slam shut.
- Features smooth-action ball bearing rackmount slides.
- Rugged steel construction with durable powder coat finish.
- LCD auto-shutoff in the closed position.
- Internal cable arm provides proper cable management for sliding the drawer open and closed.
- Equipped with On Screen Display (OSD).

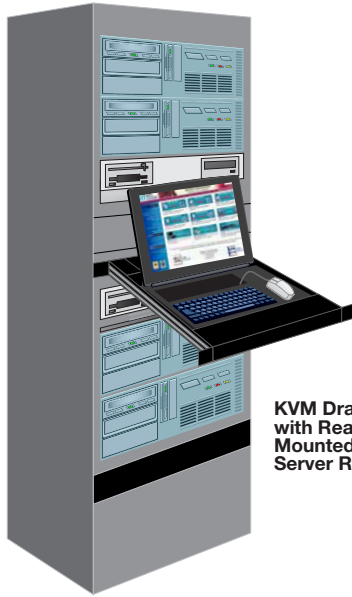

KVM Drawer
with Real Mouse
Mounted in
Server Rack



RACKMUX-V17-MP

The RACKMUX® USB + PS/2 KVM Drawer with Real Mouse combines an LCD monitor, keyboard, and real mouse with mouse pocket. This KVM drawer is ideal for anyone who prefers using a real mouse to touchpads or trackballs. The low, 1RU (1.75") profile saves space in crammed server racks. Connect this compact data entry device to a KVM switch for convenient control of all attached computers.

Specifications

Host Interface

- Compatible with PS/2, UNIX and USB-enabled computers.
- Multiplatform support: Windows 2000/XP/Vista/Server 2000/2003/2008, Solaris, Linux, FreeBSD, and MAC OS 9/10.
- 5-foot (1.5-meter) attached cables with one male 15-pin HD, two male 6-pin miniDIN and one USB Type A connectors for connecting to host.

Monitor

- Backward-folding 17" (432 mm) Active Matrix LCD flat panel VGA monitor.
- 1280x1024 video resolution.
- OSD controls for brightness, contrast, phase, pitch, Horiz- and Vert-center alignment, zoom and color adjustment.
- Frequency:
 - Horizontal: 31.5 to 80 kHz.
 - Vertical: 60 to 85 Hz.
- Viewing angle:
 - Horizontal: 178°, Vertical: 178°
- Sync: H/V Separate (TTL).
- 300 nits brightness and 500:1 contrast ratio typical.
- Supports DDC1 and DDC2B protocols.
- 3-foot (0.91-meter) attached cable with male 15-pin HD connector for connecting to host.

Regulatory Approvals

- CE, RoHS

Devices

- Keyboard available in: English (US).
 - 83-key (US) keyboard.
- Three-button optical mouse included.

Dimensions

- WxDxH: 19x29.7x1.75 in (483x754x44 mm)
- Weight: 32.6 lbs (15 kg).
- Drawer is adjustable to various rack depths from 29.7" (754 mm) deep to 43" (1,092 mm) deep.
- Drawer locks into place when open to prevent it from sliding in and out of the rack.

Power

- 110 to 220 VAC at 50 or 60 Hz via AC adapter.
- Power Consumption: 50 W

Environmental

- Operating temperature: 32 to 104°F (0 to 40°C).
- Storage temperature: -4 to 140°F (-20 to 60°C).
- Operating and Storage Relative Humidity: 20 to 90%

Warranty

- Two years